


Secures up to 14 skateboards. Welded constructed using mild steel round tubing, square tubing and channel. Sixteen steel rings are provided for securing the skateboards. All components are zinc plated. The unit can either be flush mounted to a flat concrete surface and secured using 4 masonry style anchors (not included) and the 4 - 5/8" D holes found in the pedestal feet (2 per foot), or the unit can be embedded 16" into wet concrete. See recommended concrete depth line below.

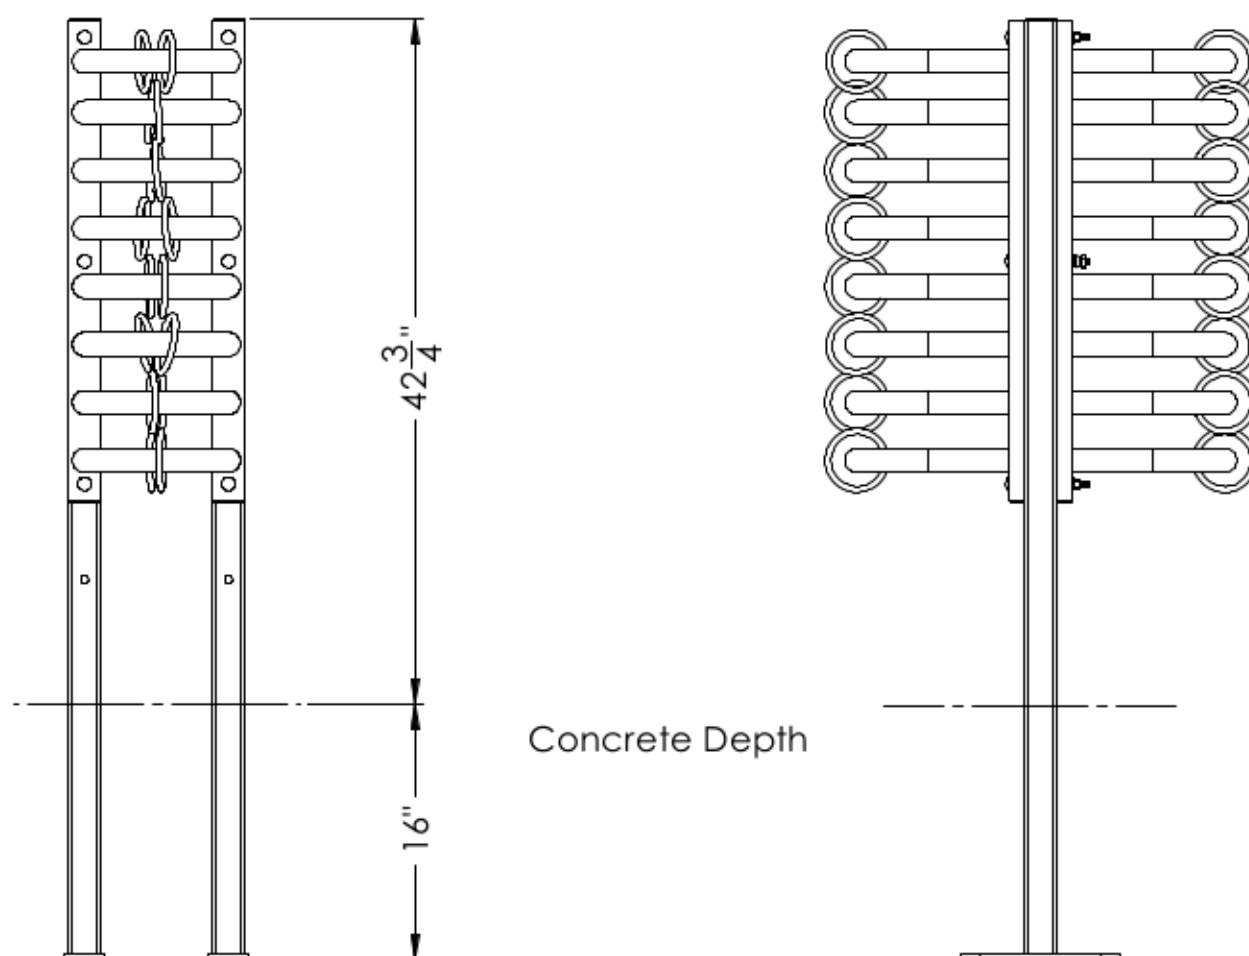

Concrete Depth